

SEAL STIC™

QUICK CURE STEEL EPOXY



A hand-moldable steel filled epoxy with industrial strength. SEAL STIC™ fill holes and cracks, bonds and repairs almost everything.

- ✓ Useful for sealing & bonding
- ✓ Ready to use
- ✓ Repairs in 20 minutes
- ✓ High mechanical strength
- ✓ Can be drill and tap, filed or painted after cured

- ✓ Safe for drinking water
- ✓ Works underwater
- ✓ Does not crack, shrink or pull away
- ✓ Non-toxic & solvent-free
- ✓ Withstand temperature up to 150°C



Filling up pipe threading



Sealing pipe flanges



Sealing holes in pipe



Filling cracks on surface



Filling up gaps



Filling up holes in wall




Fill holes on metal surface



Fill pitting on pipes


How to Use

Step 1

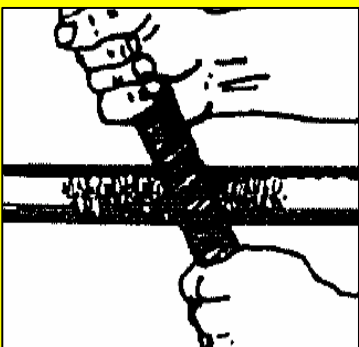

To achieve maximum bond, clean the surface from rust, grease, oil, etc.

Step 2 Step

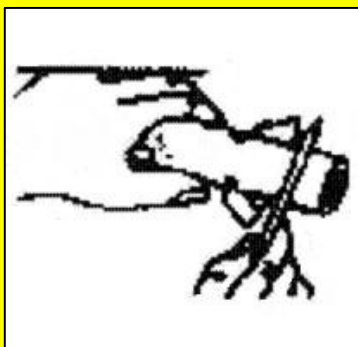


Cut the quantity of SEAL STIC™ required

Step 3



Mix homogeneously until the mixture gets uniform colour

4

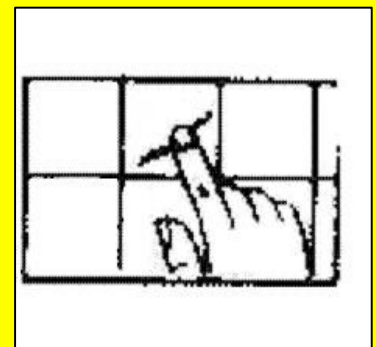

Apply on the surface immediately



EVS Water Management and Leak Detection

Q16 Greenogue Business Park, Rathcoole, Dublin 24, Ireland.

Phone : +353 (0)1 2573413

Email : info@expressvalveservices.com

Web : www.expressvalveservices.com

© Copyright 2004